



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H01M 12/06, 2/02, 2/10, 2/12	A1	(11) International Publication Number: WO 00/36688 (43) International Publication Date: 22 June 2000 (22.06.00)
---	----	---

(21) International Application Number: PCT/IL99/00684

(22) International Filing Date: 15 December 1999 (15.12.99)

(30) Priority Data:

60/112,292	15 December 1998 (15.12.98)	US
60/119,568	10 February 1999 (10.02.99)	US
60/129,666	15 April 1999 (15.04.99)	US
09/293,927	15 April 1999 (15.04.99)	US
60/161,767	27 October 1999 (27.10.99)	US

(71) Applicant (for all designated States except US): ELECTRIC FUEL LIMITED [IL/IL]; Western Industrial Park, P.O. Box 641, 99000 Bet Shemesh (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): GIVON, Menachem [IL/IL]; Uziel Street 12, 58343 Holon (IL).


(74) Agent: REINHOLD COHN AND PARTNERS; P.O. Box 4060, 61040 Tel Aviv (IL).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: PACKAGING FOR METAL-AIR BATTERIES WITH HYDROGEN RELEASE VALVE

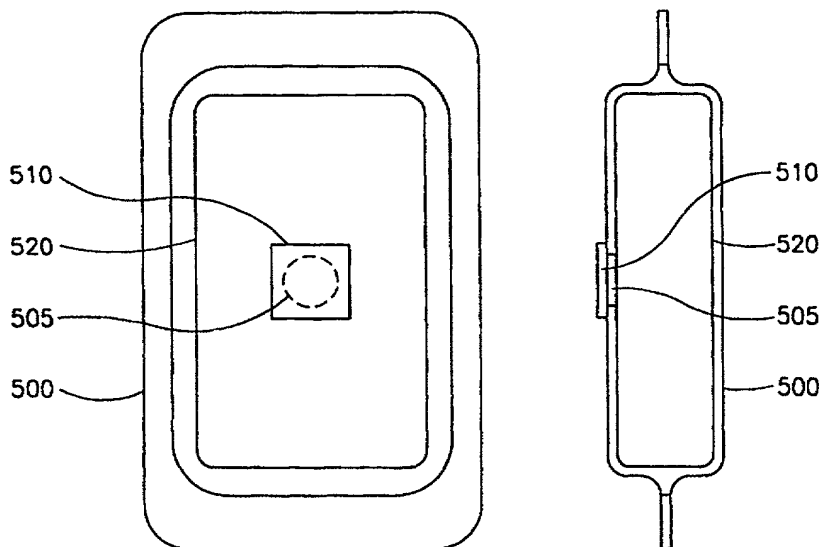

(57) Abstract

A packaging for metal-air batteries and devices with metal-air batteries. The packaging substantially restricts the ingress of oxygen into the packaging, as well as other undesirable elements such as water, dirt and carbon dioxide. The packaging also allows for the egress of hydrogen out of the packaging, which may be produced during the corrosion process of the metal anode. The packaging is made of an air-impermeable material with a one-way valve for the egress of hydrogen gas.